
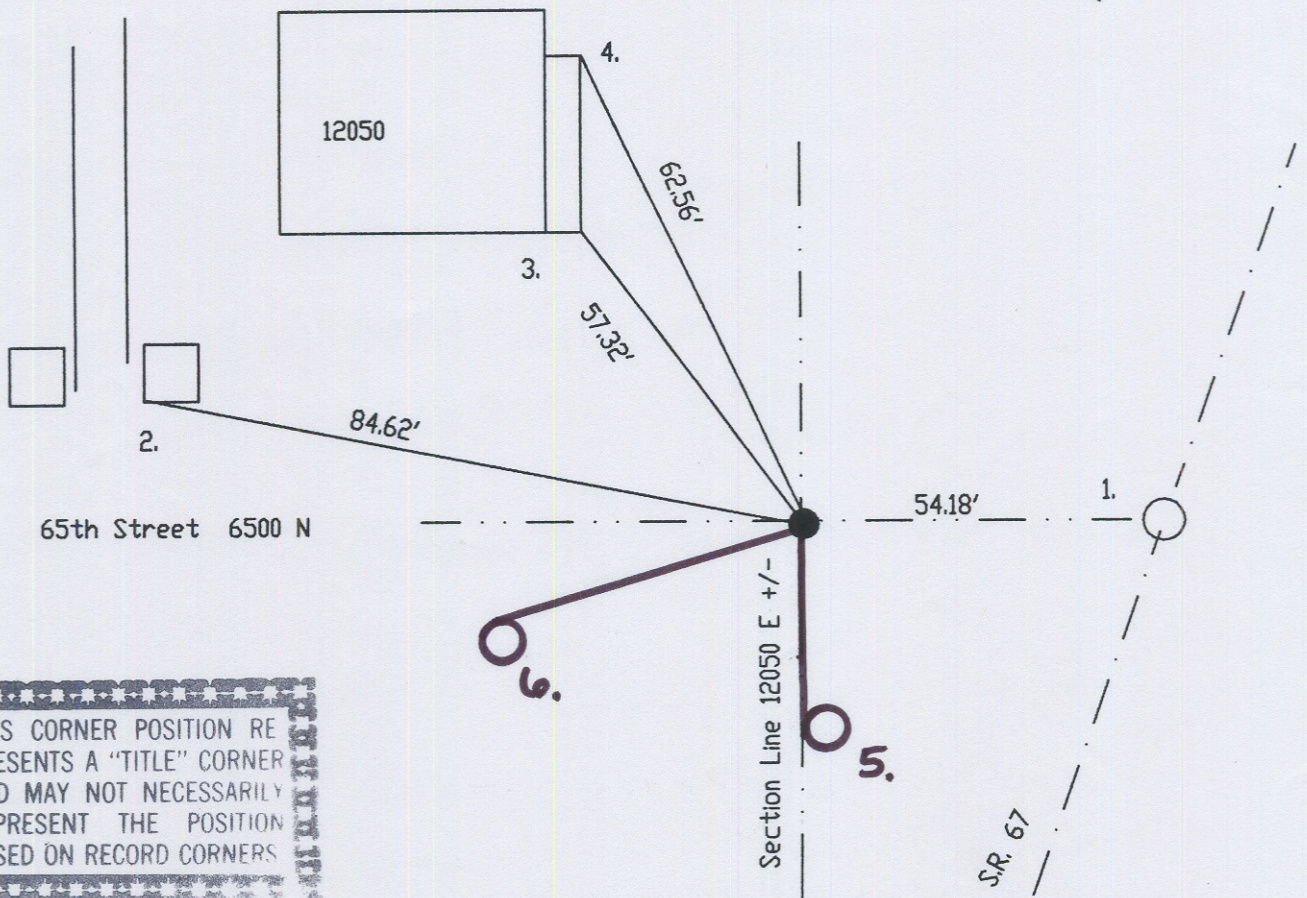


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 34 TOWNSHIP 17 RANGE 5
DATE: --10-6-99-- 8-24-04
PARTY CHIEF: --Kiste-- Wilcoxon
CREW: _____
TYPE OF MARKER: Mag nail w/MCSD washer set
METHOD OF ESTABLISHMENT: County: 12-1-92

Slope distances
Note: 10-6-92 Wilcoxon found
1" iron pin down 4" &
0.3' S of section line.

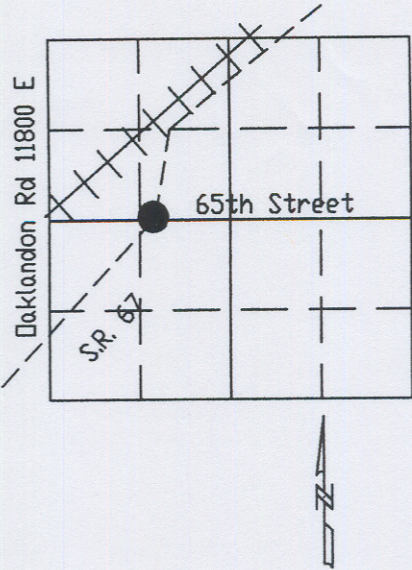

THIS CORNER POSITION REPRESENTS A "TITLE" CORNER AND MAY NOT NECESSARILY REPRESENT THE POSITION BASED ON RECORD CORNERS

170534F

Detail 99

REF.	DISTANCE	DESCRIPTION
1.	54.18'	Due E to PK nail in C/L of SR 67
2.	84.62'	SW corner of brick column
3.	57.32'	SE corner of porch for ADDRESS 12050
4.	62.56'	NE corner of porch for ADDRESS 12050
5.	16.20'	Mag nail w/bw W PwP#2-3219
6.	48.62'	Mag nail w/bw N PwP#242-321C

